

EASY:DEMI

Ion exchange demineralization system to produce demineralized water below $1\mu\text{s} / \text{cm}$. Suitable for a wide range of applications such as process water in industry and professional washes.

- Flow Rate: 100 - 120 l/h a 15°C .



Water quality
drinkable



Water temperature
 $5 - 35^\circ\text{C}$



Minimum flow rate
400 l/h



Supply pressure
150 - 600 kpa



MADE IN ITALY



rev. 01 | 19-10



TECHNICAL SPECIFICATIONS

Pre-filtration	Profine® blue small
Post-filtration	Profine® big yellow 6.0
Membranes	nr. 3
Tank	20 nominal liters
Type of feed water	drinking
Pre-filter autonomy	70 h
Post-filter yellow autonomy	22.000 Litri * (150mg/L di CaCO_3)
Weight	35 kg

* autonomy may vary depending on the organoleptic characteristics of the incoming water

POWER SUPPLY SPECIFICATIONS

Power supply type	230 V
Frequency	50/60 Hz
Absorbed current	1.5 A
Installed power	345 W

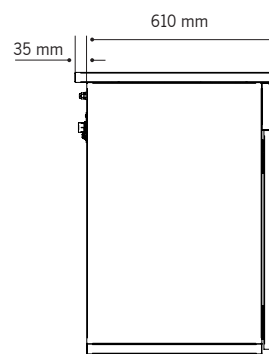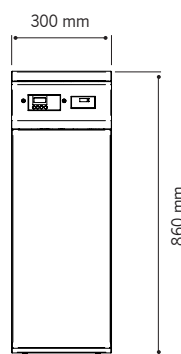

BLUE SMALL

Prefiltration is guaranteed by PROFINE® BLUE which reduces and removes the turbidity present in water, chlorine, flavors and odors. Its nominal filtration degree is 5 microns. It is a quick-attach cartridge with extruded carbon block filtration compliant with DM 174/2004 and DM 25/2012.



BIG 6.0 YELLOW

PROFINE® BIG YELLOW refines the qualities of water, allowing to obtain a water free of salts. Thanks to the exclusive formulation of the bed of specific ion exchangers. It also offers vital protection for machine technology, allowing optimum protection against corrosion.